



# COE50CCLIR-K | DATASHEET

Area scan camera CMV50000, CMOS, Global shutter, 7920 x 6004, 48 MP, 4.6 µm/pix, Full Frame, Color, 24.4 fps, Camera Link, Dual Full, 85 MHz, M58x0.75 FD 12.96 mount, IR cut



## KEY ADVANTAGES

### High quality rugged design

Using the latest industrial components, these cameras are built to last and allow for extended temperature ranges.

### Available in USB3 and Camera Link

USB3 offers high speed and easy installation, while Camera Link guarantees maximum performance and direct access to the camera sensor.

### Excellent image quality

Built-in features include pixel correction, column defect correction, white balancing, flat-field correction.

### Optics to match

Many Opto Engineering® Telecentric lenses match these 35mm sensors for the best optical performance.

**COE High Resolution Area Scan cameras** are designed to provide high-resolution images, using the latest High Res sensors that offer both quality and speed.

## SPECIFICATIONS

### Sensor Specification

Megapixel	48
Resolution	7920 x 6004
Sensor format	Full Frame
Sensor diagonal (mm)	45.7
Pixel size (µm)	4.6
Sensor model	CMV50000
Sensor type	CMOS
Shutter	Global
Chroma	Color

### Camera Specification

Filter	IR cut
Framerate (fps)	24.4
Exposure time	> 110 µsec
ADC resolution (bit)	12
Dynamic range (dB)	64
Gain range	1-4x
Image Processing	ROI, Shading correction, Image Storage, Defect pixel correction
Synchronization	Free run, software trigger, hardware trigger

### Connectivity

Data connector	SDR
Data interface	Camera Link, Dual Full, 85 MHz
I/O connector	6-pin Hirose
I/O interface	1x input, 1x output
Serial interface	no
Econder interface	no
Power requirements (V)	6-14
Max power consumption <sup>1</sup> (W)	8

### Compliance

Client software	COE-HR-USB3 Demo viewer, Camera Control Application
Operating systems	32/64-bit Windows XP/7/10
Shock and vibration	10G (20-200Hz) XYZ; 70G 10ms
Warranty (years)	1

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.

**Mechanical Specifications**

Mount	M58x0.75 FD 12.96
Dimensions <sup>2</sup>	(mm) 85 x 80 x 47
Clamping system	8x M3 threaded holes (on 4 sides)


**Environment**

Operating temperature	(°C)	0-60
Storage temperature	(°C)	-40-+70
Operating relative humidity	(%)	20-80, non condensing

<sup>1</sup> Measured at 12 VDC


<sup>2</sup> Width measured without fan grid

**HIROSE PINOUT**

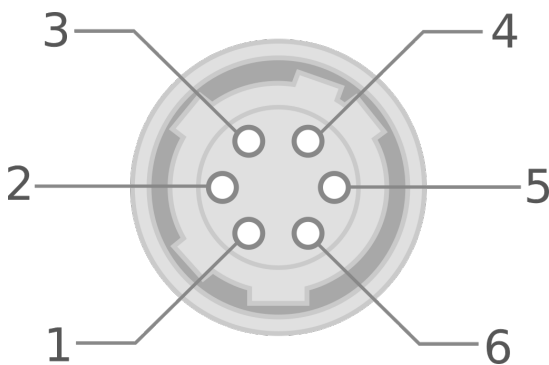

Pin	Signal Name
1	+12V
2	DC Ground
3	Trigger IN
4	STROBE OUT
5	NO CONNECT
6	NO CONNECT

**SENSOR QUANTUM EFFICIENCY**

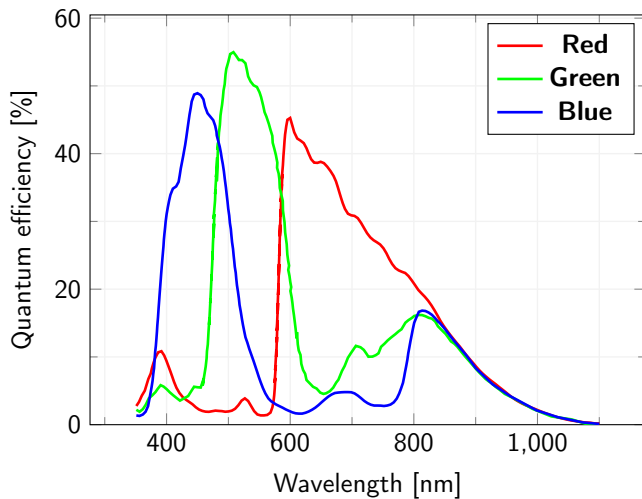

**RECOMMENDED POWER SUPPLY**

Opto-Engineering® suggests the following accessories to power the camera:

- **COE-6P-MALE**, 6 pin Male cable for COE HR AS series, 2 meters.
- **COE-PS-UNIVERSAL**, Power supply for COE HR AS series cameras.

**COMPATIBLE PRODUCTS**

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.